

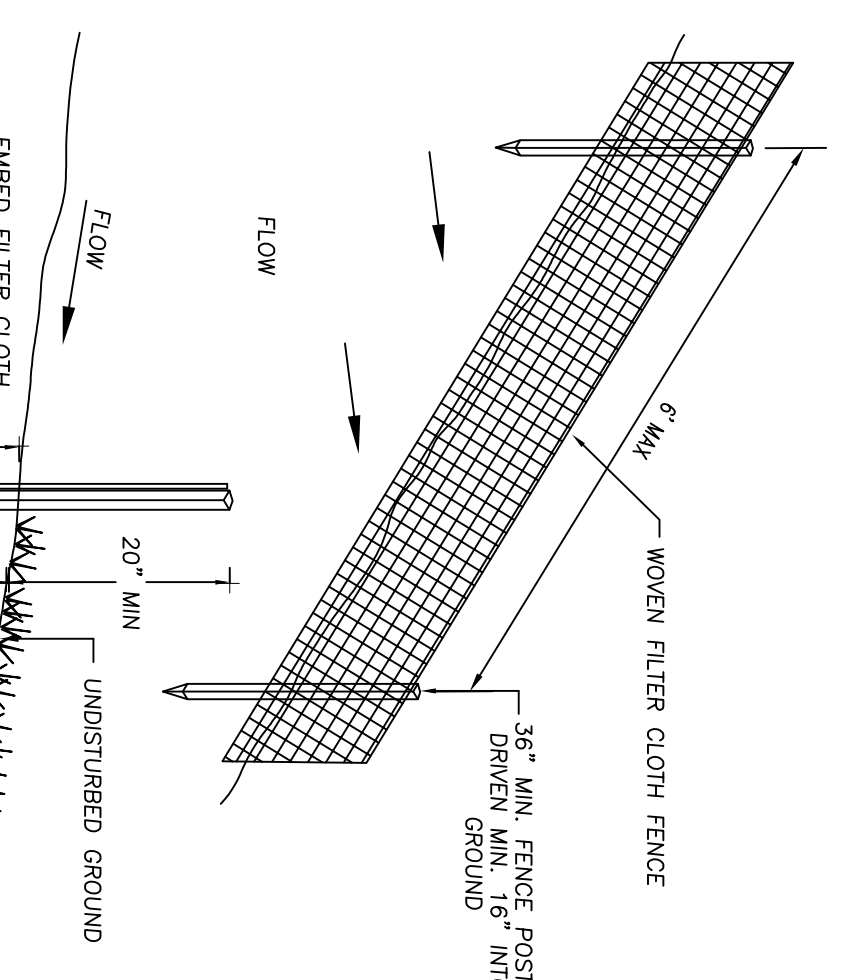
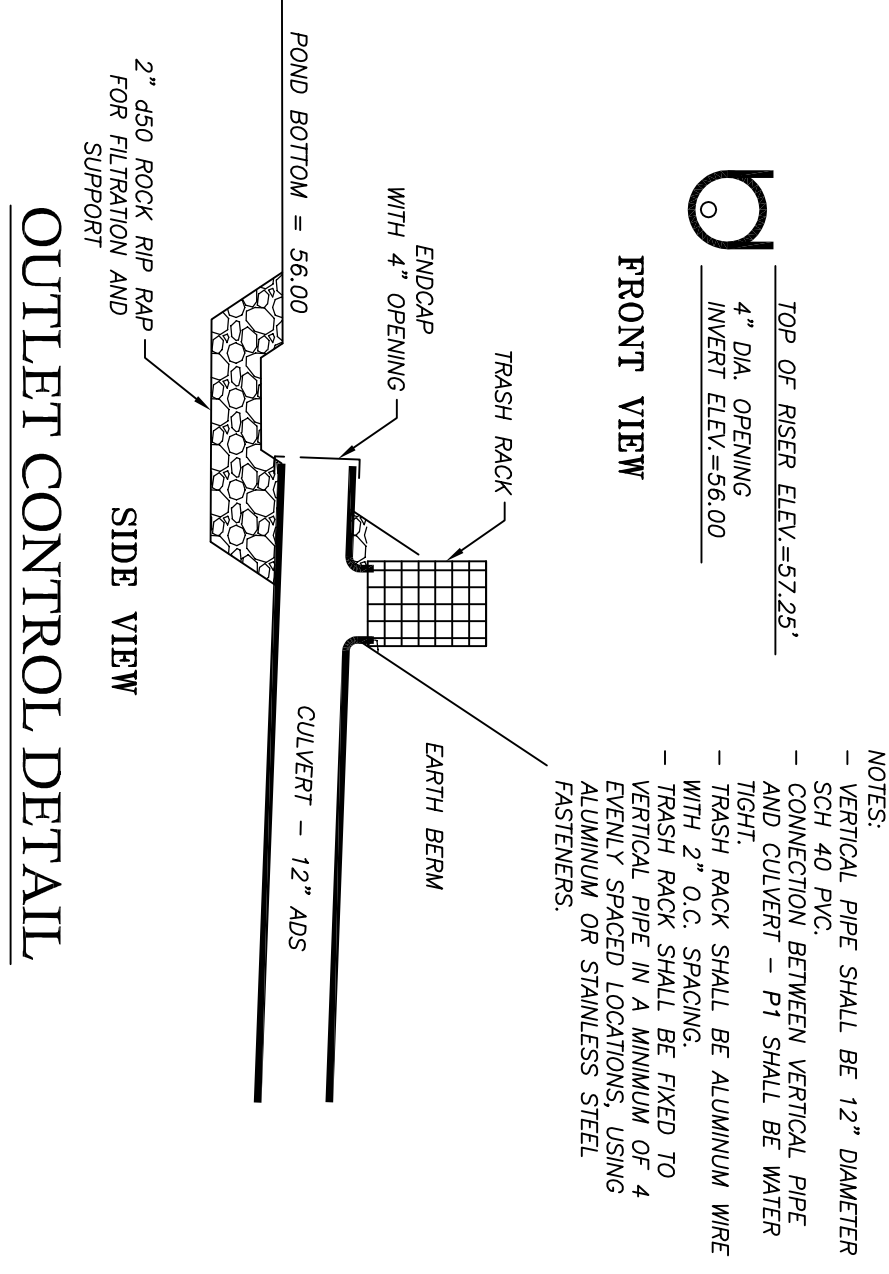
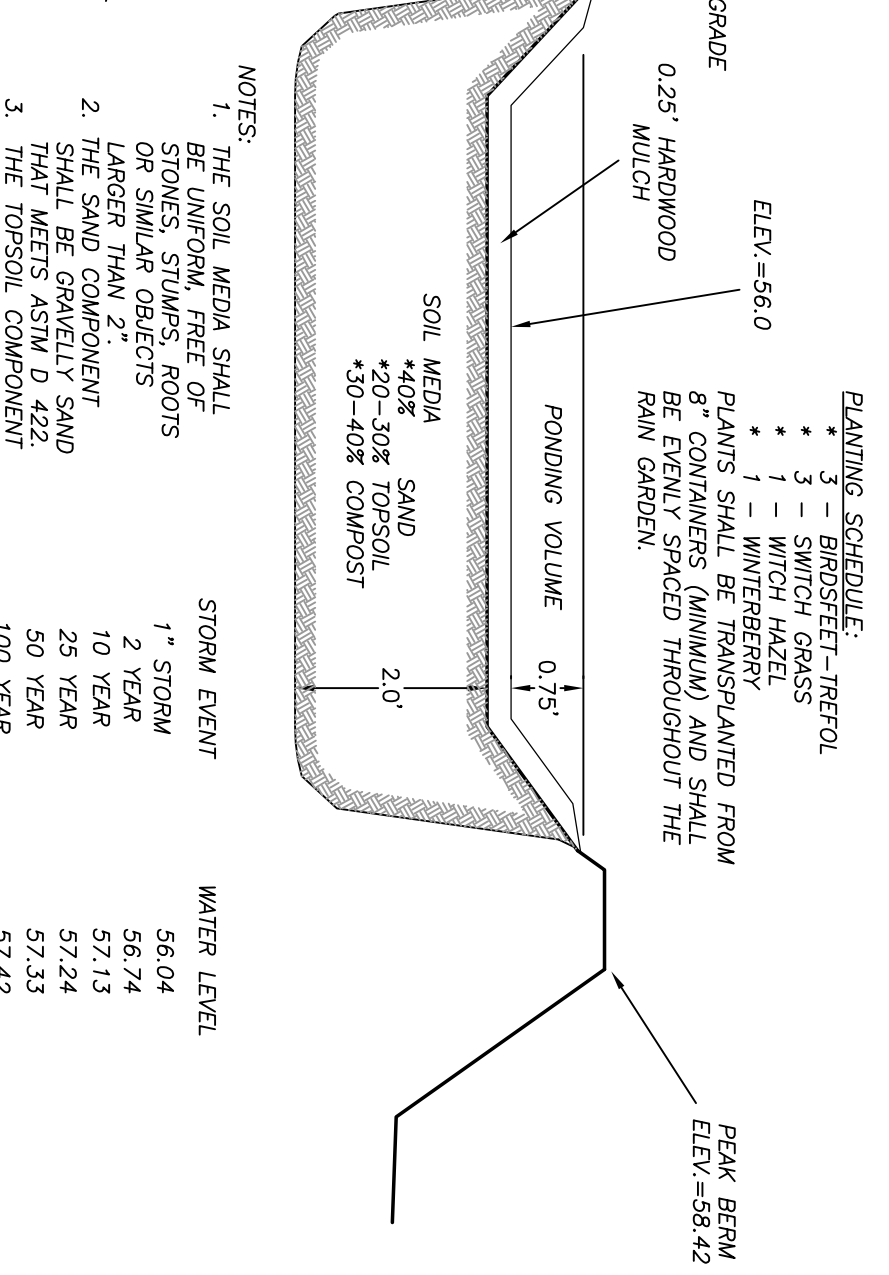
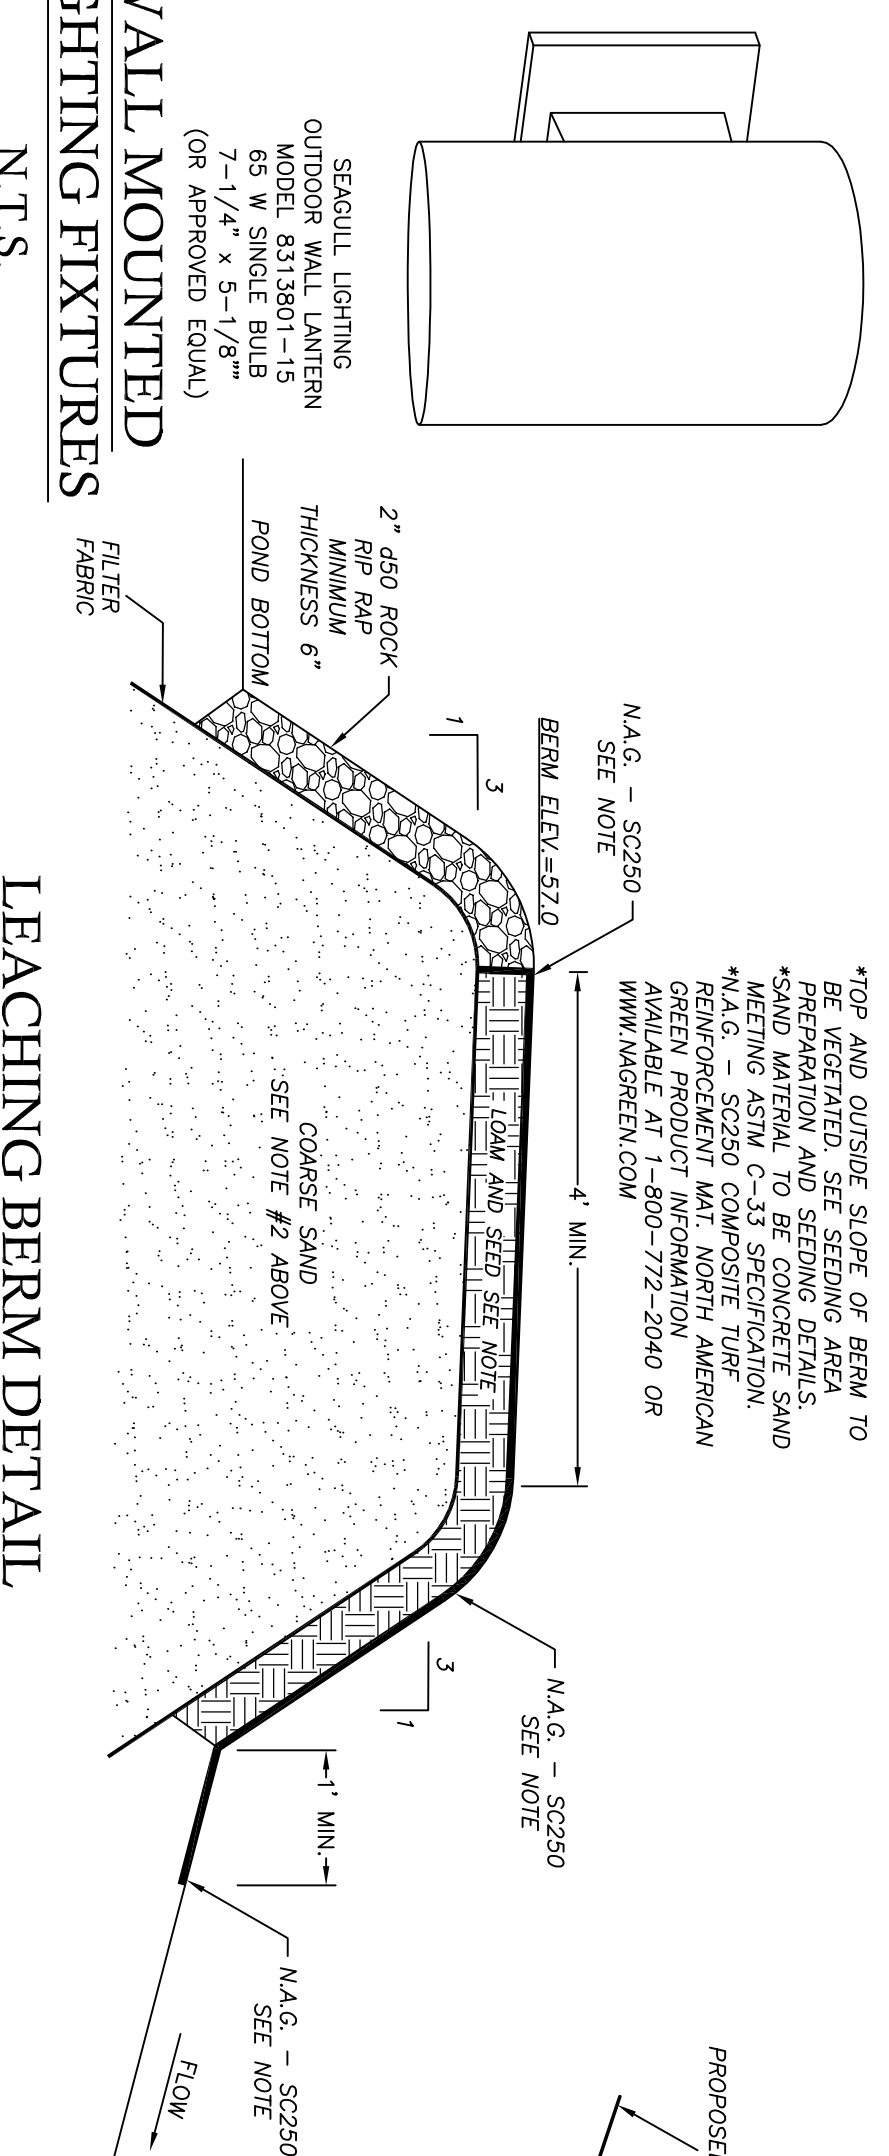
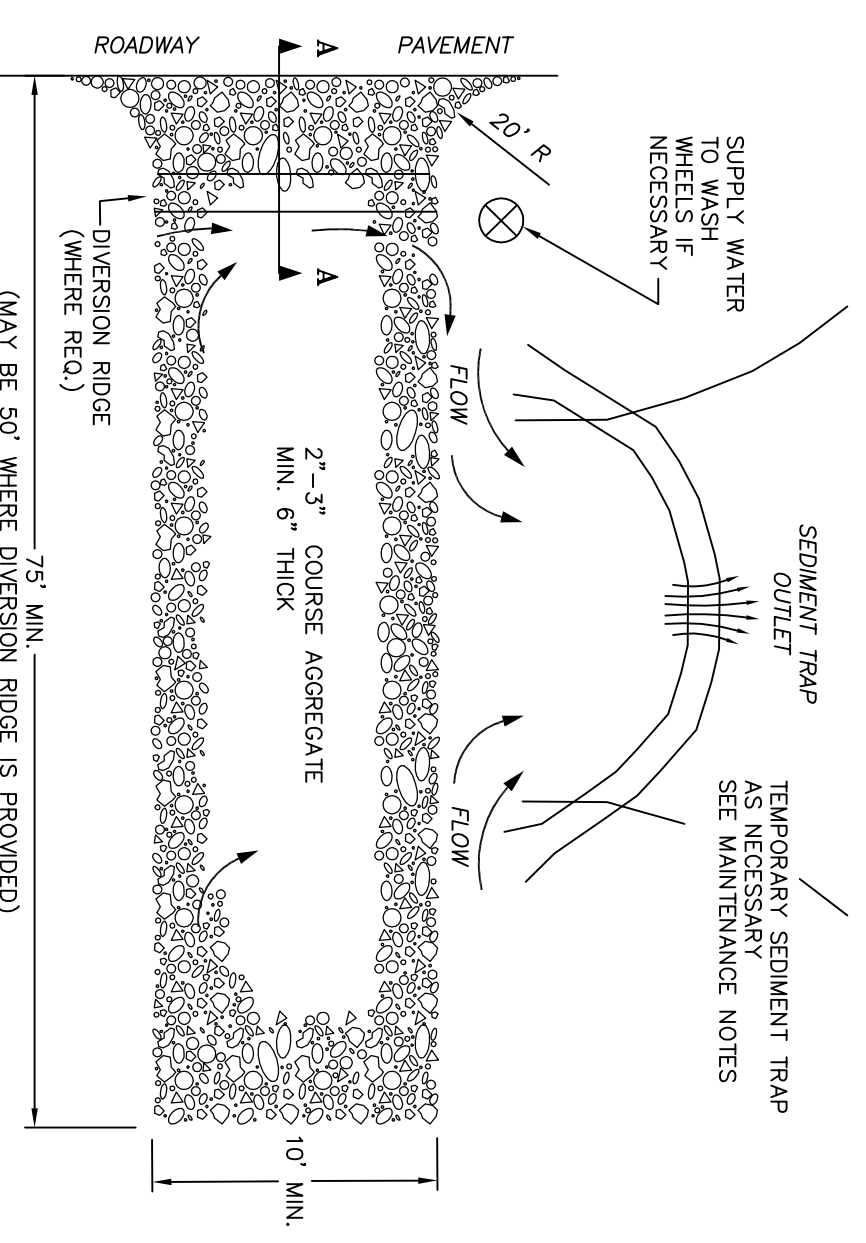
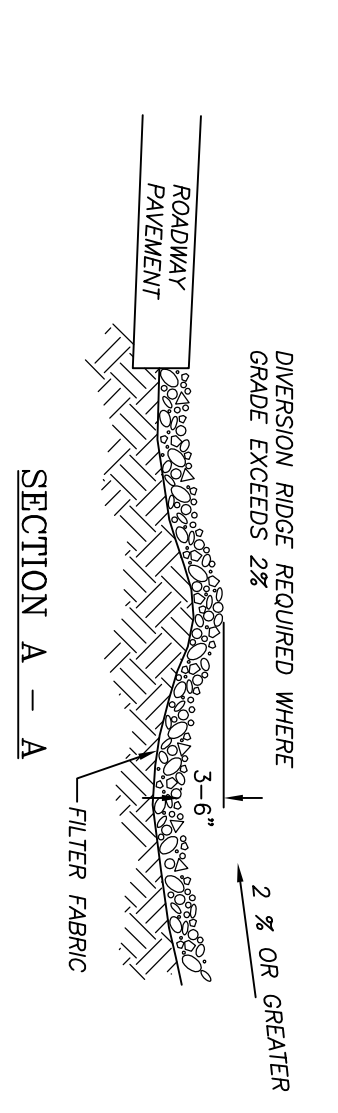
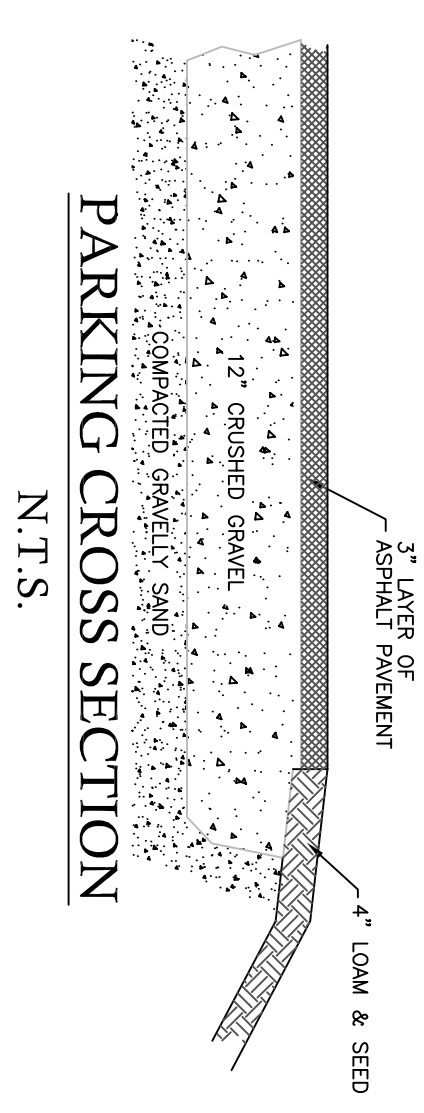
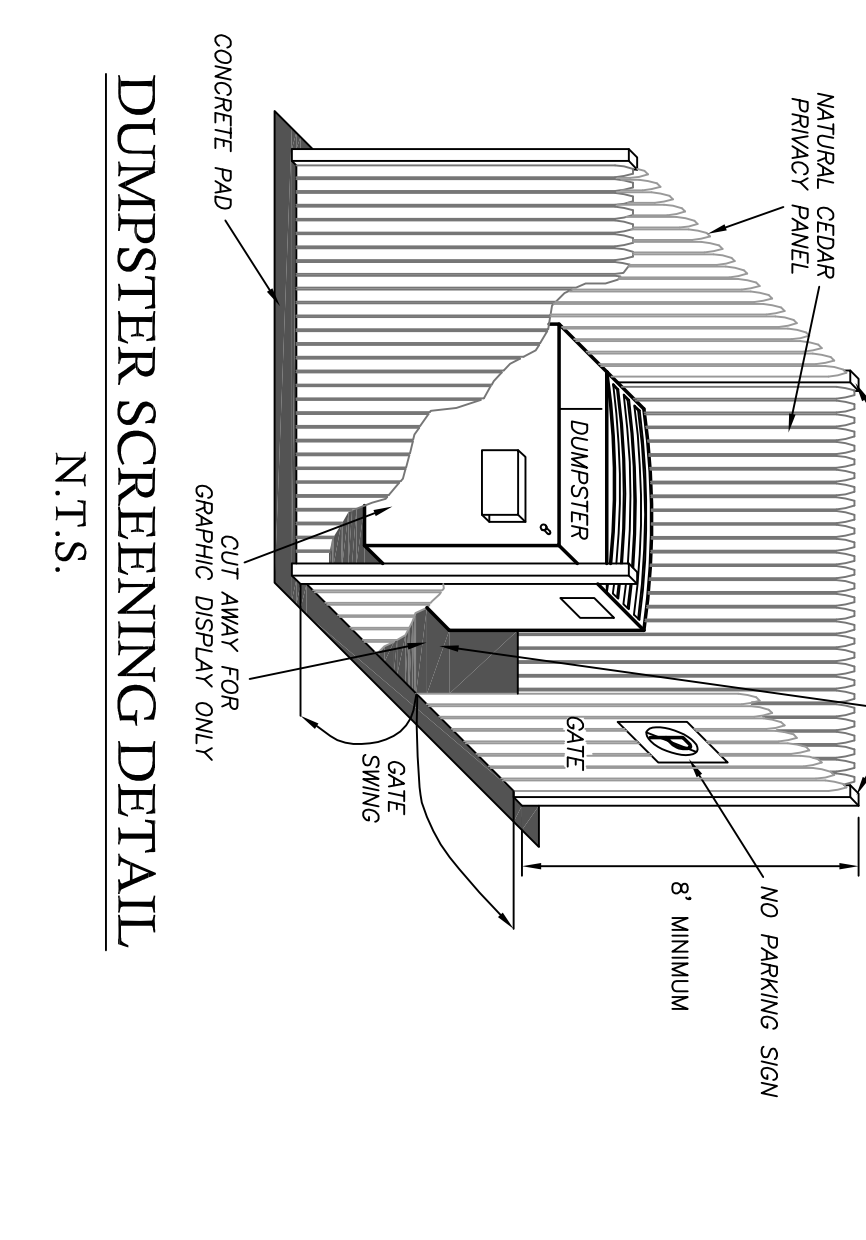
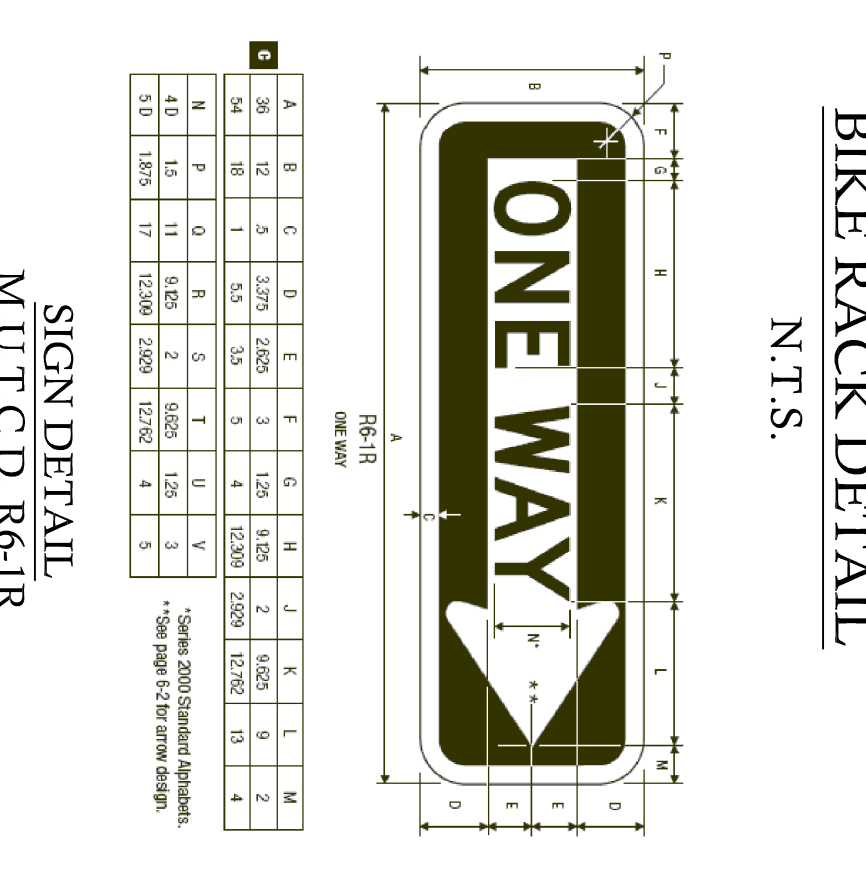
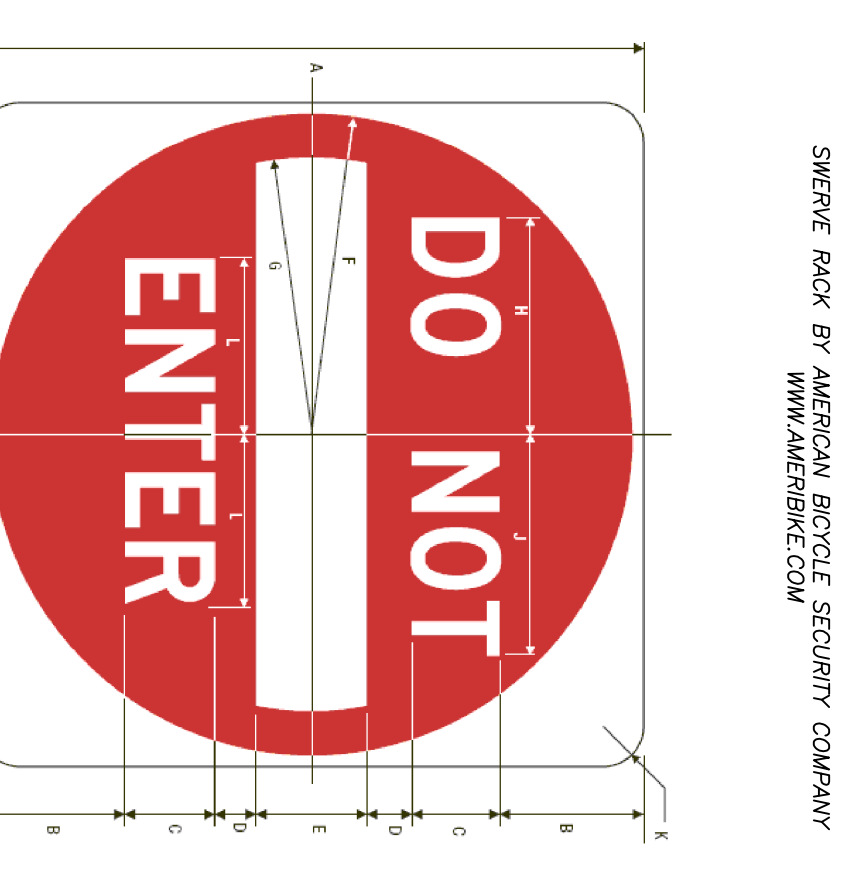


**EXTERIOR LIGHTING FIXTURES**  
 N.T.S.




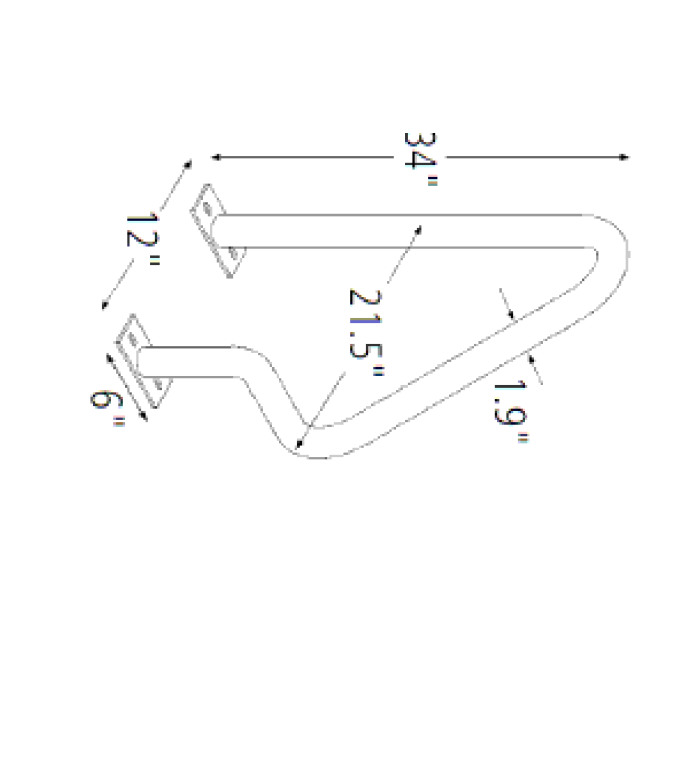


- CONSTRUCTION NOTES FOR FABRICATED SILT FENCE**
1. SILT FENCE SHALL BE PLACED PRIOR TO ANY CONSTRUCTION
  2. WOVEN FILTER CLOTH TO BE FASTENED SECURELY TO FENCE POSTS WITH WIRE TIES OR STAPLES
  3. WHEN TWO SECTIONS OF FILTER CLOTH ADJOIN EACH OTHER, THEY SHALL BE OVERLAPPED BY 6 INCHES AND FOLDED.
  4. MAINTENANCE SHALL BE PERFORMED AS NEEDED AND MATERIAL REMOVED WHEN "BULGES" DEVELOP IN THE SILT FENCE.

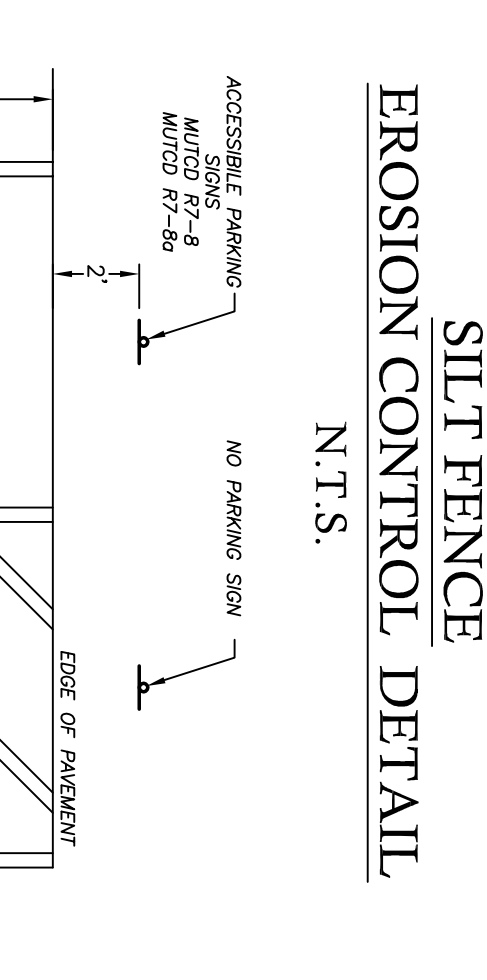

**TEMPORARY CONSTRUCTION EXIT DETAIL**  
 N.T.S.

**INSTALLATION NOTES:**  
 \*THE MINIMUM STONE USED SHOULD BE 3-INCH CRUSHED STONE.  
 \*THE MINIMUM LENGTH OF THE PAD SHOULD BE 75 FEET, EXCEPT THAT THE MINIMUM LENGTH MAY BE REDUCED TO 50 FEET IF A 3-INCH TO 6-INCH HIGH BERM IS INSTALLED TO EXTEND THE FULL WIDTH OF THE CONSTRUCTION ACCESS. ROAD OR SIDEWALK SHOULD EXTEND THE FULL WIDTH OF THE CONSTRUCTION ACCESS. ROAD OR SIDEWALK SHOULD BE AT LEAST 6 INCHES THICK.  
 \*THE PAD SHOULD SLOPE AWAY FROM THE EXISTING ROADWAY.  
 \*A GEOTEXTILE FILTER FABRIC SHOULD BE PLACED BETWEEN THE STONE PAD AND THE COMPACTED SUBGRADE.  
 \*MAINTENANCE NOTES:  
 \*WHEN THE CONTROL PAD BECOMES INEFFECTIVE, THE STONE SHOULD BE REMOVED ALONG WITH THE COLLECTED SOIL MATERIAL, REGRADED ON SITE, AND STABILIZED. THE FILTER FABRIC SHOULD BE RELOCATED TO THE ADJACENT PAVEMENT OR TRAVELED WAY.  
 \*WHEN WHEEL WASHING IS REQUIRED, IT SHOULD BE CONDUCTED ON AN AREA STABILIZED WITH AGGREGATE, WHICH DRAINS INTO AN APPROVED SEDIMENT-TRAPPING DEVICE. ALL SEDIMENT SHOULD BE PREVENTED FROM ENTERING STORM DRAINS, DITCHES, OR WATERWAYS.  
 \*CONTROL PAD SHOULD BE REMOVED ONCE THE ENTIRE HAS BEEN STABILIZED SUCH THAT MATERIALS WILL NOT BE TRACKED ONTO THE EXISTING ROADWAY SURFACE.

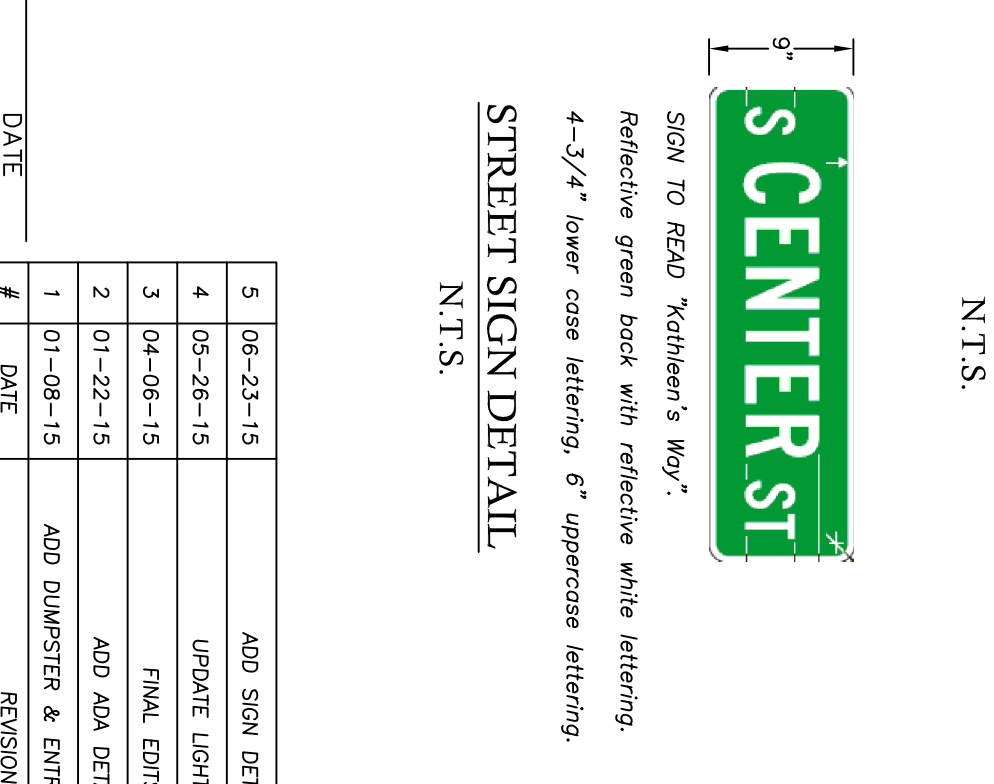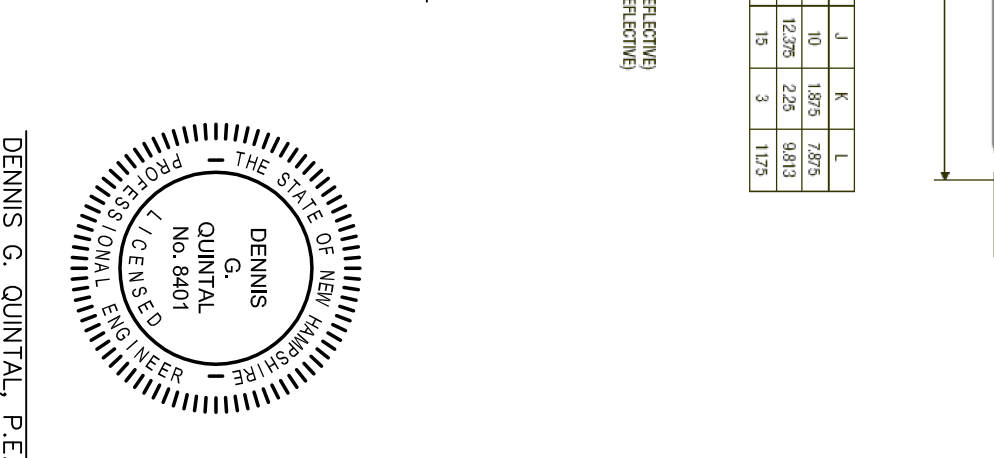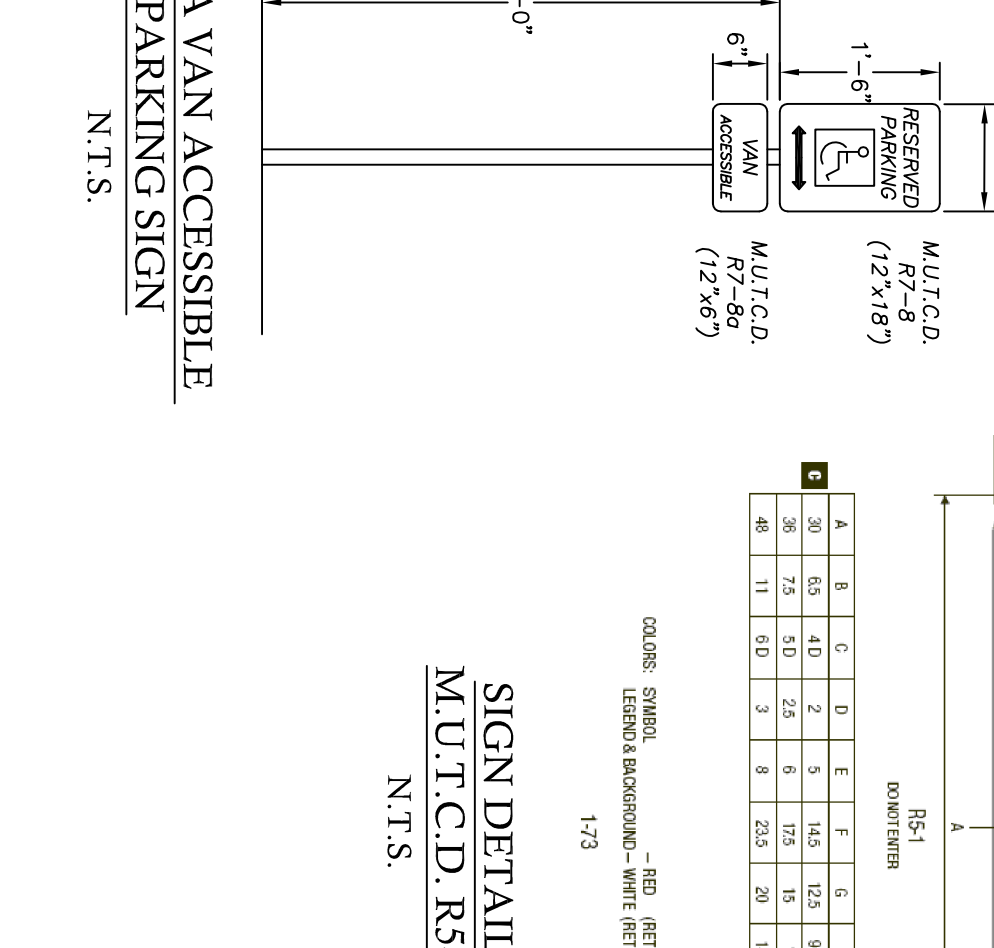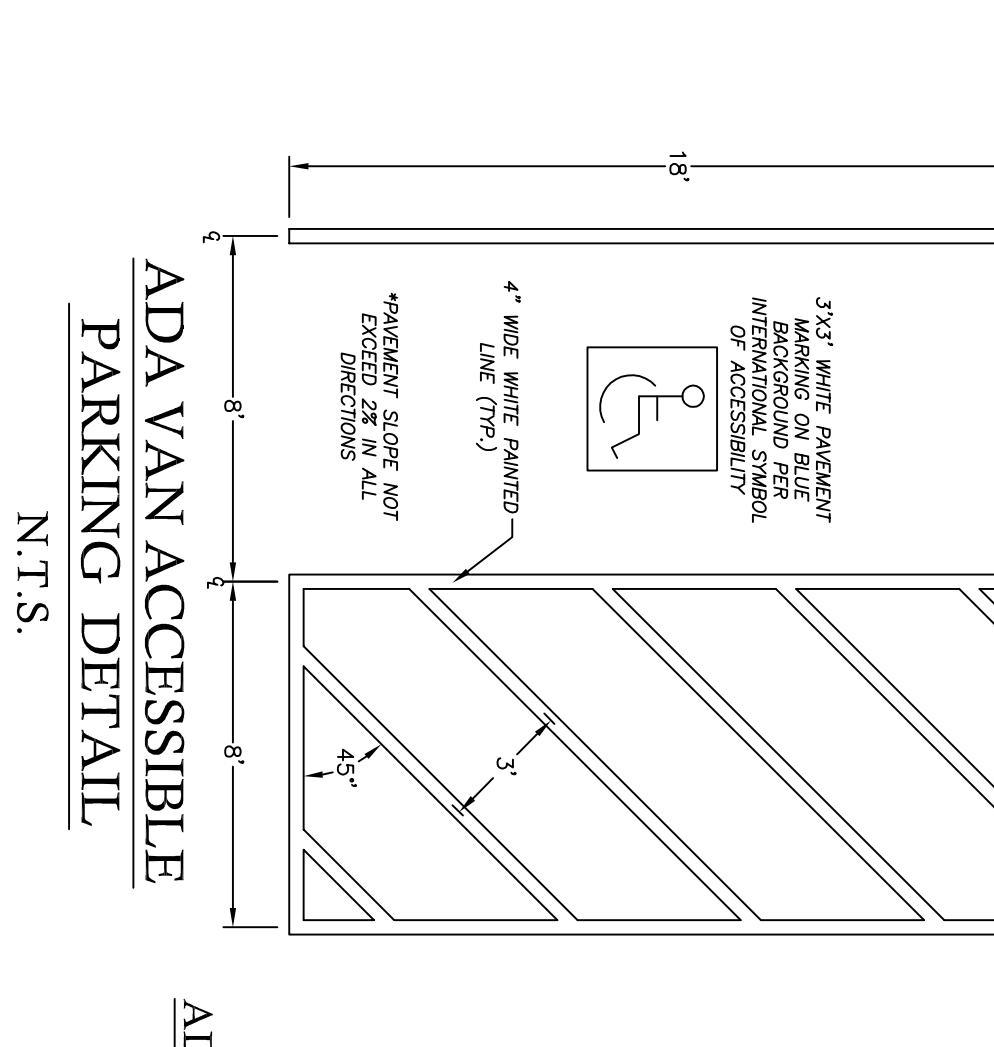

**STREET SIGN DETAIL**  
 N.T.S.

NO.	DATE	REVISION
1	01-08-15	ADD DUMPSTER & ENTRANCE DETAILS
2	01-22-15	ADD ADA DETAILS
3	04-08-15	FINAL EDITS
4	05-28-15	UPDATE LIGHTING
5	06-23-15	ADD SIGN DETAILS

**DETAILS**  
**TAX MAP 18 - LOT 3-2**  
**257 NEWMARKET ROAD**  
**DURHAM, NH**

**OWNER/APPLICANT:** SEACOAST OPM REALTY, LLC  
 P.O. BOX 1733  
 DOVER, NH 03821

**DESIGN BY:** Civil Construction Management Inc.  
 8 Merrimack Road, Box 475  
 Newton, NH 03858  
 Tel (603) 382-7650

**DRAWN BY:** D. NALLY, M.S.C.E. CHK. BY: D. QUINTAL, P.E.  
 DESIGNED BY: D. NALLY, M.S.C.E. DATE: 11-14-14

**Sheet: D**